




## **Strapping**

Ideal Products' strapping is made from T-304 Series Stainless Steel, which meets ASTM A-240 standards, and Aluminum Alloy 3003, 3105 meeting ATSM B209 standards. Ideal Products' strapping is manufactured from a soft annealing, making it easy to handle. Stainless Steel is available in both 1/2" and 3/4" widths and in 0.015" and 0.020" thicknesses, while Aluminum is available in both 1/2" and 3/4" widths and 0.020" thickness. Ideal Products has "No Asbestos" engraved strapping to help identify asbestos free insulation areas. Asbestos free banding is available by custom order in 1/2" width by 0.020" thickness.

1/2" Strapping 0.015" -Bright Annealed  
-Mill Finish

1/2" Strapping 0.020" -Bright Annealed  
-Mill Finish  
-No Asbestos

3/4" Strapping 0.020" -Bright Annealed

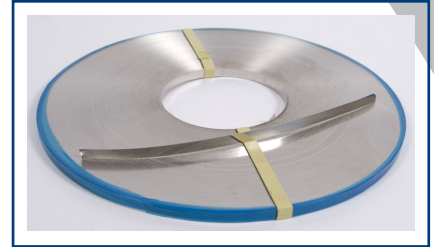

## **Wing Seal**

Ideal Products' Wing Seals are available in 1/2" and 3/4" widths in Aluminum and Stainless Steel. Ideals' wing seals are made from 0.025" thick, heavy duty 300 Series Stainless Steel and 0.024", 0.032" Aluminum.



## **Stainless Steel Closed Seals**

Stainless Steel closed seals are available in 1/2" and 3/4" widths. They are made from 0.025" thick heavy duty 300 Series Stainless Steel. Closed Seals are designed to be used for diameters of 8' and over. A standard seal tool is required for use with this particular seal. Closed seals ensure a stronger closure over wing seals on high tension or expansion spring applications.

## **Stainless Steel Tie Wire**

Ideal Products' Tie Wire is manufactured from T-304 Stainless Steel, and is available in both 16 and 18 gauge on 25lb or 5lb spools.

