


CLEAR COATED ALUMINUM ROLL JACKETING

WITH PAINTED MB

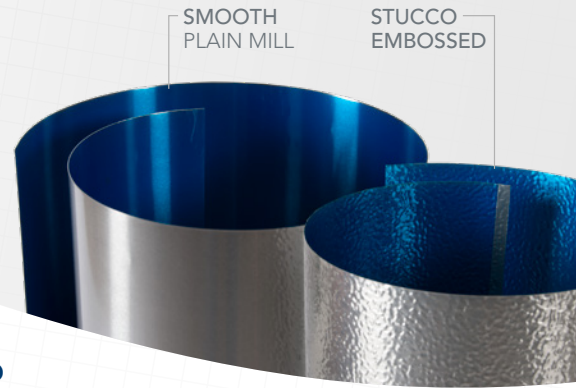

PRODUCT DESCRIPTION

Ideal Products Aluminum Roll Jacketing is produced from 3003 and 3105 series aluminum, meeting ASTM B-209 standards. Both the interior and exterior of this product have a factory applied, heat cured, polyester coating, suitable for durable corrosion protection of pipes, tanks and vessels. The exterior clear finish helps in the prevention of oxidation and resists the dulling of the aluminum, while the interior finish provides a highly effective moisture barrier.

PRODUCT APPLICATION

Ideal Products Painted Aluminum Roll Jacketing is manufactured to be used in various cladding applications particular to mechanical insulation systems. The metal can be cut and rolled to fit around straight pipe, bends, and vessels, or fabricated into various other cladding applications like beveled collars, endcaps, and gored peels including tank heads. Ideal Products Painted Aluminum Jacketing is a better suited choice for protecting the insulation and underlying pipe or tank from corrosive ambient conditions, UV exposure, water, physical damage, or to increase emittance. For greater levels of corrosion resistance, Ideal Products SST jacketing should be used. To select the correct or best suited type of cladding for your application, please refer to Ideal Products metal jacketing application guidelines, or ASTM C1729 and ASTM C1767.

PHYSICAL PROPERTIES

FINISHES

SMOOTH PLAIN MILL | STUCCO EMBOSSED | CROSS CRIMP

COLORS

A large variety of colored exterior finishes can be added to Aluminum Roll Jacketing for desired preferences or to reach specific emissivity levels. Please refer to Ideal Products standard color chart below for reference. Other colors are available upon request.

PAINT COLORS



Color chips shown are standard colors and may not represent an exact match, painted metal samples and custom colors are available upon request.

RECOMMENDED APPLICATION THICKNESSES

ALUMINUM PIPE JACKETING *min. thickness**

OUTER INSULATION DAIMETER (in)	MIN. ALLOWABLE THICKNESS (in)	
	RIGID Insulation	NON-RIGID Insulation
≤ 8	0.016	0.016
over 8 – 11	0.016	0.020
over 11 – 24	0.016	0.024
over 24 – 36	0.020	0.032
over 36	0.024	0.040

*as per ASTM C1729

MATERIAL SPECIFICATIONS

ALLOYS	3003, 3105
TEMPERS	H12, H14, H24
THICKNESSES	0.016", 0.020", 0.024", 0.032", 0.040"
MOISTURE BARRIERS	Blue Factory Applied Heat Cured Acrylic or Polyester Paint.
EXTERIOR COATING	Clear; Factory Applied Heat Cured Polyester Paint.
MELTING POINT	660 °C (1220 °F)
ASTM E84 Flame Spread/Smoke Development	25/50 or less
ASTM C1371 Surface Emittance	Clear Coat: > 0.5
ASTM C1729	Type III, Grade 1, Class D

Safer. Smarter. Faster.

CANADA 1.800.299.0819 | USA 1.888.877.7685 | WWW.IDEALPRODUCTS.CA

